

HEWLETT-PACKARD COMPANY

Intellectual Property Administration
P.O. Box 272400
Fort Collins, Colorado 80528-9599

PATENT APPLICATION

ATTORNEY DOCKET NO. 10981337-1

IN THE U.S. PATENT AND TRADEMARK OFFICE
Patent Application Transmittal LetterASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 CFR 1.53(b) is a(n): ☒ Utility () Design☒ original patent application,
() continuation-in-part application

INVENTOR(S): Michael J. Jones

TITLE: Printed Medium Data Storage

Enclosed are:

- (X) The Declaration and Power of Attorney. (X) signed () unsigned or partially signed
 (X) 23 sheets of drawings (one set) () Associate Power of Attorney
 () Form PTO-1449 (X) Information Disclosure Statement and Form PTO-1449
 () Priority document(s) (X) (Other) Petition to Accept Color Drawing (fee \$ 130.00)

CLAIMS AS FILED BY OTHER THAN A SMALL ENTITY				
(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) TOTALS
TOTAL CLAIMS	22 — 20	2	X \$18	\$ 36
INDEPENDENT CLAIMS	5 — 3	2	X \$78	\$ 156
ANY MULTIPLE DEPENDENT CLAIMS	0		\$260	\$ 0
BASIC FEE: Design \$310.00 ; Utility \$690.00				\$ 690
TOTAL FILING FEE				\$ 882
OTHER FEES				\$ 130
TOTAL CHARGES TO DEPOSIT ACCOUNT				\$ 1,012

Charge \$ 1,012 to Deposit Account 08-2025. At any time during the pendency of this application, please charge any fees required or credit any over payment to Deposit Account 08-2025 pursuant to 37 CFR 1.25. Additionally please charge any fees to Deposit Account 08-2025 under 37 CFR 1.16, 1.17, 1.19, 1.20 and 1.21. A duplicate copy of this sheet is enclosed.

"Express Mail" label no. EL382314616USDate of Deposit April 20, 2000

I hereby certify that this is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231.

By:

Typed Name: Raymond A. Jenks

Respectfully submitted,

Michael J. Jones

By: *Raymond A. Jenks*

Raymond A. Jenks

Attorney/Agent for Applicant(s)

Reg. No. 31,267

Date: April 20, 2000

Telephone No.: (541) 715-8441

PRINTED MEDIUM DATA STORAGE

Background

The present invention generally relates to printing on a hardcopy medium and more particularly relates to placing data within or adjacent the text or graphic printed on a hardcopy medium.

Inkjet printing is usually considered to be a technique of directing small discrete quanta of ink from a reservoir to a sheet or medium such as paper, transparency film, and the like to produce perceptible alphanumeric, graphic, and pictorial images on the medium. The energy needed to move the quanta of ink (ink drops, usually) can come from thermal, piezoelectric, electrostatic, acoustic, electromagnetic, and similar energy sources. The basics of inkjet printing technologies can be found in Output Hardcopy Devices, W.J. Lloyd and H.T. Taub (edited by R.C. Durbeck and S. Sherr), Academic Press, San Diego, 1988, chapter 13. The ink drops are deposited on the printed medium as dots of ink colorant from which the liquid ink vehicle quickly evaporates. For text, ink dots are deposited in an arrangement that produces a full colorant (usually black) presence where a character is to be printed and an absence of colorant in the spaces within and between the characters. Roughness of the edges of the printed character due to the quantum nature of each ink drop can be mitigated by

careful selection of the placement of each drop at the character edge (as well as other optimizations of ink chemistry, media, and the like).

For gray scale printing and color image printing, the concept of printing in superpixels has come into being to enable gradations of intensity and hue to be realized. A superpixel is generally recognized to be a coordination of an area (the superpixel) of the printed medium, usually a theoretical square that is subdivided into smaller square areas. Into each of the smaller areas (referred to as pixels) a dot can be placed, or left unplaced, depending upon the level of gray scale or the color to be realized for the superpixel. See, for example, US Patent No. 4,930,018. Moreover, to avoid undesirable artifacts (Moiré patterns, "worms", etc.) of printing using discrete quanta (dots), dithering and error diffusion calculations are made and the dots are distributed among the superpixels to reduce the artifacts in accordance with the calculations. See, for example, US Patent No. 5,031,050.

Generally without regard to the method of printing, others have begun to employ techniques of embedding information (data) into a printed image. In US Patent No. 5,905,819 the art of steganography was identified as a precursor to the more recent desire to hide a digital message within a printed image. Digital steganography was interpreted, there, as encompassing techniques of tamper-proofing (providing the ability to determine whether a digital image has been manipulated or modified from an original), digital watermarking (providing the ability to establish ownership and copyright infringement), image tagging (adding a unique identifier to each image copy to identify the individual creating bootleg copies), digital pointers (providing, for example, an invisible internet address for additional information), and data augmentation (providing, in a form relatively undetectable by human perception, additional information regarding the image in which the data is hiding). This patent discloses a complex method of combining the desired image and the data in a manner

which disturbs the desired image very little. This disclosed method, however, suffers from the drawback that the original image must be known for the data to be recovered from the combined copy. Also see, for example, US Patent No. 5,859,920.

Hidden information in a visible image has also found usage in postal franking applications. In one instance, described in US Patent No. 5,829,895 where a two-pass dot matrix printing method is used to place a postal indicia on an envelope, one of the passes places a message in the printed postal indicia by adjusting the dot matrix dot density to create a lightly populated dot density, thereby enabling the message to be readable due to the low population of dots. The second printing pass places a higher dot density in the previously low dot population density area in order to obliterate the message. Postal franking fraud can thereby be avoided.

Other techniques of preventing postal fraud include the use of fluorescing (or phosphorescing) ink, which is invisible in the human-perceptible light spectrum, to be printed in a print layer over a visibly perceptible print layer. Thus, a bar code printed over the visible print (such as that described in US Patent No. 5,693,693) can contain more, and relatively secure, information than that available in a conventional bar code.

In a separate technological direction, Infolmaging Technologies, Inc. is presently marketing a product called 3D FaxFile. This product converts documents (text, color images, etc.) into a digital black and white pattern that can be transmitted via a standard fax machine.

At the receiving end, the faxed document can be scanned or otherwise reconverted into a digital data stream that is subsequently recomposed into a copy of the original document. Coding and data compression can yield a secure and significantly smaller document to be faxed than the original. And, a color document can be transmitted by an otherwise colorless transmission technology.

The foregoing notwithstanding, there exists a need to provide a technique of adding information to or storing information on a printed medium. The use of color offers an expanded capability for higher information density than simple black and white printing. Moreover, if two or more blocks of information, which can be unrelated, are to be printed on the medium it is desirable that the information not interfere with each other and that each be independently recoverable from the printed medium.

Summary

Printing information on a medium includes the acceptance of data representing a first information and the acceptance of data representing a second information. The second information adds informational value over the first information. Marks of a first color are deposited in accordance with the first data and marks of a second color are deposited in accordance with the second data. In this way, the first information and the second information are printed on the medium and are detectable as separate first information and second information from the printed medium.

Brief Description of the Drawings

The file of this patent contains at least one drawing executed in color. Copies of this patent with color drawings will be provided by the Patent and Trademark Office upon request and payment of necessary fee.

FIG. 1 is an isometric drawing of a printing apparatus, which may employ the present invention.

FIG. 2 is an isometric drawing of an inkjet printer carriage mounting two inkjet print cartridges such as may be utilized in the printing apparatus of FIG. 1.

FIG. 3 is a block diagram of the essential parts of a printing apparatus such as that of FIG. 1.

FIG. 4 is a flowchart of a document printing process as may be used for the printing apparatus of FIG. 1.

5 FIG. 5 is a flowchart illustrating a method, which may be employed in the present invention, to merge second information data with first information data prior to printing.

FIG. 6 is a flowchart that illustrates the raster data merge process of FIG. 5.

FIG. 7 is a printed example of second information data that has been rasterized and may be employed according to the present invention.

10 FIG. 8 is a printed magnification of an area of FIG. 7.

FIG. 9 is a printed magnification of an area of FIG. 8.

FIG. 10 is a printed merged raster data combining the raster data of a first information black text with that of a second information data, which has been converted to color rasterized data in accordance with the present invention.

15 FIG. 11 is a printed magnification of an area of FIG. 10.

FIG. 12 is a printed magnification of a portion of one printed raster line of FIG. 10.

FIG. 13 is a printed magnification of a portion of two printed raster lines of FIG. 10 with the black text (first data) information removed.

FIG. 14 is a printed complete page from which first information black text data has
20 been removed, leaving only rasterized second information data.

FIG. 15 is a printed magnification of an area of FIG. 14.

FIG. 16 is a printed merged raster data combining the raster data of a first information data black graphic image with that of a second information data, which has been converted to color rasterized data in accordance with the present invention..

FIG. 17 is a printed version of FIG. 16 with first information data black graphic image removed.

FIG. 18 is a printed magnification of a portion of FIG. 17.

FIG. 19 is a printed merged raster data combining the raster data of a first information
5 black text with that of a second information data, which has been converted to grayscale
raster data in accordance with the present invention.

FIG. 20 is a printed magnification of a portion of one printed raster line of FIG. 18.

FIG. 21 is a printed magnification of an area of FIG. 18 with the black text (first data)
information removed.

FIG. 22 is a printed merged raster data combining data of a first information data text
10 with that of a second information data which has been converted to color rasterized data in
accordance with an alternative embodiment of the present invention.

FIG. 23 is a printed page illustrating a printed output on a hardcopy medium, which
may be produced in accordance with an alternative embodiment of the present invention.

FIG. 24 is a printed merged raster data combining the raster data of a first information
15 data black text with that of a second information data, which has been converted to color
rasterized data in accordance with an alternative embodiment of the present invention and in
which second information rasterized data is printed in constrained regions of the page not
containing first information raster data.

FIG. 25 is a printed hardcopy output that illustrates a complete output page containing
20 a color gradient and bounding boxes to permit calibration and alignment of the scanning
process.

FIG. 26 is a printed hardcopy output that illustrates a complete output page containing a grayscale gradient and bounding boxes to permit calibration and alignment of the scanning process.

5 **Detailed Description of the Preferred Embodiments**

The present invention advantageously uses the multi-color dot deposition capability of color printing devices to place multiple channels or data sources of information on a printed medium by encoding each channel or data source in a different range of ink colors onto the printed medium. Although the preferred embodiment describes the use of an inkjet printer to place color marks in the form of ink dots on a recording medium, other printing devices such as laser printers, which also place color marks on a recording medium, may also profit from the present invention. The range of colors can be a single identifiable color such as black or cyan, a color gamut that can be separable into digitally encodable colors (for example 2^{24} combinations of yellow, cyan, and magenta inks, commonly known in inkjet printing), shades of gray (commonly referred to in printing as grayscale), or colors that are imperceptible to humans (such as those having reflectance or absorption in infrared or ultraviolet).

An exemplary inkjet printing apparatus, a printer 101 that may employ the present invention, is shown in outline form in the isometric drawing of FIG. 1. Printing devices such as graphics plotters, copiers, and facsimile machines may also profitably employ the present invention. A printer housing 103 contains a printing platen to which an input print medium 105, such as paper, is transported by mechanisms that are known in the art. Other forms of media can be overhead transparency material or fabric. A carriage 209 within the printer holds one or a set of individual print cartridges capable of ejecting ink drops of black or color ink. Alternative embodiments can include a semi-permanent printhead mechanism that is

sporadically replenished from one or more fluidically-coupled off-axis ink reservoirs, or a single print cartridge having two or more colors of ink available within the print cartridge and ink ejecting nozzles designated for each color, or a single color print cartridge or print mechanism; the present invention can be satisfactorily employed by at least these alternatives.

5 The carriage 209, which may be employed in the printer 101, mounts two print cartridges 210 and 211, as illustrated in FIG. 2. The carriage 209 is typically supported by a slide bar or similar mechanism within the printer and physically propelled along the slide bar to allow the carriage 209 to be translationally reciprocated or scanned back and forth across the print medium 105. The scan axis, X, is indicated by an arrow in FIG. 1. As the carriage 209 scans

10 across the medium, ink drops are selectively ejected from drop generators disposed within the printheads of the set of print cartridges 210 and 211 onto the medium 105 in predetermined print swath patterns, forming images or alphanumeric characters using dot matrix manipulation. Generally, the dot matrix manipulation is determined by a user's computer (not shown) and instructions are transmitted to a microprocessor-based, electronic controller

15 within the printer 101. Other techniques employ a rasterization of the data in a user's computer prior to the rasterized data being sent, along with printer control commands, to the printer. This operation is under control of printer driver software resident in the user's computer. The printer interprets the commands and rasterized data to determine which drop generators to fire. The ink drop trajectory axis, Z, directed from the print cartridge toward the

20 medium is indicated by an arrow. When a swath of print has been completed, the medium 105 is moved an appropriate distance along the print media axis, Y, indicated by the arrow, in preparation for the printing of the next swath. This invention is also applicable to inkjet printers employing alternative means of imparting relative motion between printhead and media, such as those that have fixed printheads (such as page wide arrays) and move the

media in one or more directions, those that have fixed media and move the printhead in one or more directions (such as flatbed plotters). In addition, this invention is applicable to a variety of printing systems, including large format devices, copiers, fax machines, photo printers, and the like.

5 The inkjet carriage 209 and print cartridges 210, 211 are shown from the -Z direction within the printer 101 in FIG. 2. The printheads 213, 215 of each cartridge may be observed when the print cartridges are viewed from this direction. In a preferred embodiment, ink is stored in the body portion of each printhead 210, 211 and routed through internal passageways to the respective printhead. In an embodiment of the present invention which is
10 adapted for multi-color printing, three groupings of orifices, one for each color (cyan, magenta, and yellow), are arranged on the foraminous orifice plate surface of the printhead 215. Ink is selectively expelled for each color under control of commands from the printer that are communicated to the printhead 215 through electrical connections and associated conductive traces (not shown) on a flexible polymer tape. In the preferred embodiment, the
15 tape is typically bent around an edge of the print cartridge and secured. In a similar manner, a single color ink, black, is stored in the ink-containing portion of cartridge 210 and routed to a single grouping of orifices in printhead 213. Control signals are coupled to the printhead from the printer on conductive traces disposed on a polymer tape. In other applications not shown, additional ink cartridges having additional colors may be mounted on the carriage
20 209. For special purposes, ink that is colorless in visible light but that is absorptive, fluorescent, or phosphorescent in the infrared or ultraviolet may also be used.

As can be appreciated from a preferred embodiment shown in FIG. 3, a single medium sheet is advanced from an input tray into a printer print area beneath the printheads by a medium advancing mechanism including a roller 307, a platen motor 309, and traction

devices (not shown). In a preferred embodiment, the inkjet print cartridges 210, 211 are incrementally drawn across the medium 105 on the platen by a carriage motor 311 in the $\pm X$ direction, perpendicular to the Y direction of entry of the medium. The platen motor 309 and the carriage motor 311 are typically under the control of a media and cartridge position controller 313. An example of such positioning and control apparatus may be found described in U.S. Patent No. 5,070,410. Thus, the medium 105 is positioned in a location so that the print cartridges 210 and 211 may eject drops of ink to place dots on the medium as required by the data that is input to a drop firing controller of the printer. These dots of ink are formed from the ink drops expelled from selected orifices in the printhead in a band parallel to the scan direction as the print cartridges 210 and 211 are translated across the medium by the carriage motor 311. When the print cartridges 210 and 211 reach the end of their travel at an end of a print swath on the medium 105, the medium is conventionally incrementally advanced by the position controller 313 and the platen motor 309. Once the print cartridges have reached the end of their traverse in the X direction on the slide bar, they are either returned back along the support mechanism while continuing to print or returned without printing. The medium may be advanced by an incremental amount equivalent to the width of the ink-ejecting portion of the printhead or some fraction thereof related to the spacing between the nozzles. Control of the medium, positioning of the print cartridge, and selection of the correct ink ejectors for creation of an ink image or character is determined by the position controller 313 and drop firing controller 315. The controllers may be implemented in a conventional electronic hardware configuration and provided operating instructions from conventional memory 316. Once printing of the medium is complete, the medium is ejected into an output tray of the printer for user removal.

A generalized flowchart of a document printing process that controls the printer in accordance with the present invention is shown in FIG. 4. Utilizing a computer system, a document author 401 creates a document using an authoring application 402 such as Microsoft Word or Quark Xpress. The author initiates a print of the document by invoking the application's print action 403. The application code converts the digital representation of the document into drawing application programming interface function calls 404, such as Microsoft Graphics Device Interface (GDI), as can be recognized by the computer operating system. The drawing application interface function calls are sent to the printing device driver 405. The printing device driver 405 converts the operating system drawing interface function calls into a page description language, e.g. Adobe PostScript or Hewlett-Packard Printer Control Language, 407, as can be understood by the printing device. Note that some application programs can generate page description language directly in which case alternate process path 406 would be used. A raster image processor 408, generally in the printing device, but which may also be implemented within the printer device driver software in low-cost systems, converts the digital document representation into a rasterized form whereby each page of the document is represented by a separate digital raster image data, 409. The rasterized page image data 409 is then processed by the printer device controller 411 as may consist of printer memory 313, drop firing controller 315, and position controller 313 as illustrated in FIG. 3. The printing device controller instructs the printer marking engine 411 as may consist of ink cartridges 210, 211 previously described, to eject ink drops in accordance with the information input to the authoring application, to produce final printed document pages 412.

FIG. 5 illustrates the enhanced printing process, which may be employed in the present invention. This process assumes a first information data source 501 representing

“black” textual information to be printed. A second information data source 502 originating from another application is introduced. The second information data source is converted by raster data converter 503 into raster pixel data values. These data values are uniquely assigned such that the pixel value for “black” ink is not used. The second information raster data is then merged with the first information raster image data by a data merger process 504, which will be described subsequently, to produce final merged raster data 505. The final merged raster data is then sent to the printing device controller 410 and the printing process continues as previously described to eject ink drops in accordance with the first information data and the second information data at the appropriate positioning of the print cartridges 210, 211 relative to the medium 105 to produce printed pages 412 containing both the first and second information. It is a feature of the present invention that the first information and the second information are printed on the medium in such a way that the colors (i.e. the ink drops) of the first information are placed such that they accommodate and do not interfere with the colors of the second information. Further, the colors of the second information are placed such that they accommodate and do not interfere with the colors of the first information. Considered another way, the first information is deposited on the medium as a pattern of marks and the second information is deposited as a sequence of color marks in raster format, which when scanned by a scanning apparatus, recovers the data of the second information. Examples of this feature can be found in the figures accompanying this disclosure.

FIG. 6 illustrates the merge raster image data process in more detail. In this process, each superpixel value from the first information raster data is evaluated to determine if a visible “Black” mark is to be made on the printed page. If so, the superpixel value in the final raster image data is set in 604 to “Black”. Otherwise the final raster image data value is set in

605 to the value of the next superpixel in the second information raster data. Thus a final raster image is generated containing merged first and second information. In a preferred embodiment of the present invention, the scale of printed data is established as a superpixel. The scope of the present invention need not be so limited, as areas larger than a superpixel
5 may be employed to convey information on a printed medium. Likewise, areas as small as a pixel may be employed to convey information.

Several examples which illustrate output onto printed medium from a system employing the present invention follow. The features and advantages can best be perceived in the color renditions of the figures. In FIG. 7, an example of secondary information,
10 rasterized into color superpixels and printed by a color inkjet printer such as an HP970Cxi, available from Hewlett-Packard Company, is shown. Since a great amount of information can be placed in the printed area of a standard sized sheet of media (several megabytes), the secondary information can effectively store data such as pictures, text, graphics, and the like – information that may or may not be related to the primary information being printed. FIGs. 8
15 and 9 illustrate magnified views of the secondary information printed in FIG. 7 and further show a possible range of color gamut that can be applied to a printed medium for storage of secondary information.

FIG. 10 is a printed page illustrating the output of a merged raster data combining the raster data of a first information, originally input as conventional text data, and the raster data
20 of a second information, originally input as conventional picture, graphics, text, or the like data. The printed output, then, is a background of color superpixels and a foreground of black text, thereby providing first and second data independently detectable from the printed medium. As shown, the secondary background is printed with a high color intensity. Lower color intensity can be used to enhance the visibility of the first information black text but with

a reduced signal to noise for the secondary information signal. FIG. 11 is a printed illustration of a magnified portion of FIG. 10.

Recovery of the secondary information can be apprehended by viewing FIGS. 12 and 13. FIG. 12 is a printed portion of one raster line of FIG. 10. A scanning apparatus having a sufficient resolution will easily detect the color gamut of each superpixel as a scan that follows the raster line occurs. By eliminating true black from the color gamut of the scanning apparatus, the two raster line portions of FIG. 13 are detected by the scanning apparatus. From the detection of the specific color of each superpixel, the secondary data is recovered from the stream of superpixels detected in the raster line scan. For completeness of understanding, the printed illustrations of FIGS. 14 and 15 show the printed secondary data of the medium minus the black text information and a magnified view thereof (FIG. 15).

The first data need not be limited to textual data. FIG. 16 illustrates a first information graphic image (printed in true black) with a background of color superpixels encoding second information. The printed second information is shown with the first information removed in FIG. 17 and a magnified view of FIG. 17 is shown in FIG. 18.

The output from a first alternative embodiment of the present invention is shown in FIG. 19, in which "color" is taken to mean shades of gray. In this embodiment, first information is originally input as conventional text data, and the raster data of a second information, originally input as conventional picture, graphics, text, or the like data. The printed output, then, is a background of superpixels having varying shades of gray in accordance with a predetermined printer gray scale and a foreground of black text. Thus, first and second data is printed on a medium independently detectable when viewed from the printed medium. Of course, second information density is diminished from color encoding when a gray scale encoding is used. FIG. 20 shows a single raster line from the gray scale

printing of FIG. 19 and FIG. 21 shows a plurality of raster lines from the printed output of FIG. 19 but with the true black information removed.

FIG. 22 is an enlarged printed output illustrating the result from a second alternative embodiment of the present invention. In this embodiment, the secondary information is rasterized and combined with the first information and is, in fact, a fully integrated component of the first information. Specifically, the text information of the first information is comprised of the second information. The normal size printed output is shown in FIG. 23. It should be observed that when the scanning apparatus scans the raster lines of this second alternative embodiment, there is no first information to be removed. White space is ignored. If low second information is acceptable, the second information can be printed as preselected parts of the first information, for example only in text period characters.

The printed output resulting from a third alternative embodiment is shown in FIG. 24. In this instance, the second information, encoded as raster lines of color superpixels, is placed on the printed medium in positions where the first information is not printed. This second information positioning can be in predetermined locations such as interlineations or marginalia, or it can be placed where unpredictable first information is not placed.

As an aid to scanning apparatus that must detect color quantizations superpixel by superpixel and detect raster scan lines with precision, a color gradient calibration can be placed on the printed media. Such a calibration is shown printed at the top of FIG. 25. Moreover, the printed first and second information is enclosed in a true black solid line that provides orientation reference for the scanning apparatus. An equivalent gray scale calibration and solid line reference is shown in the printed output of FIG. 26.

Thus a process and apparatus for recording secondary information while retaining a first information in a way that the first and second information does not interfere has been shown and described.

I claim:

Claims

1. A method of printing information on a medium, comprising the steps of:
accepting data representing a first information;
accepting data representing a second information, said second information adding
5 informational value over said first information;
depositing marks of a first color in accordance with said first data; and
depositing marks of at least a second color in accordance with said second data, such
that said first information and said second information are printed on the medium and are
detectable from the printed medium as separate first information and second information.

10 2. A method of printing information in accordance with the method of claim 1
wherein said steps of depositing marks of a first color and depositing marks of at least a
second color further comprises the steps of:
depositing marks of said first color to accommodate said marks of said second color;
15 and
depositing marks of said second color to accommodate said marks of said first color.

3. A method in accordance with the method of claim 2 wherein said step of
depositing marks of said at least a second color to accommodate said marks of said first color
20 further comprises the step of depositing marks of said at least a second color on the medium
at locations where marks of said first color are absent.

4. A method in accordance with the method of claim 1 wherein said step of depositing marks of at least a second color further comprises the step of depositing marks of a third color in coordination with said second color marks to produce a superpixel.

5. A method in accordance with the method of claim 1 wherein said step of depositing marks of at least a second color further comprises the step of depositing marks of a second color perceptible to a human and said step of depositing marks of a first color further comprises the step of depositing marks of a first color imperceptible to a human.

6. A method in accordance with the method of claim 1 wherein said step of depositing marks of a first color further comprises the step of ejecting drops of a first color ink and wherein said step of depositing marks of at least a second color further comprises the step of ejecting drops of a second color ink.

7. A printed medium having information recorded thereon in accordance with the method of claim 1.

8. A method of printing information on a medium, comprising the steps of:
accepting data representing a first information;
accepting data representing a second information, said second information adding informational value independent of said first information; and
depositing marks of at least two colors in accordance with said first information data and said second information data such that said first information and said second information are separately detectable from the medium, said first information data determining where a

mark is to be deposited on the medium and said second information data determining a color of said at least two colors of marks to be deposited.

9. A method in accordance with the method of claim 8 wherein said step of
5 depositing marks of at least two colors further comprises the step of depositing said marks of at least two colors in coordination to produce a superpixel.

10. A method in accordance with the method of claim 8 wherein said step of depositing marks of at least two colors further comprises the steps of ejecting drops of a first color ink and ejecting drops of a second color ink.

11. A printed medium having information recorded thereon in accordance with the method of claim 8.

12. A hardcopy output having information thereon printed by a color printing apparatus, comprising:

a medium having a surface;

marks of a first color deposited on said surface and arranged in a pattern to convey a first information; and

- 20 marks of at least second and third colors deposited on said surface in locations where said marks of said first color are absent and conveying a second information by a sequence of said second and third color marks.

13. A hardcopy output in accordance with claim 12 wherein said marks of at least second and third colors further comprises a superpixel coordination of said marks of at least second and third colors.

5 14. A hardcopy output in accordance with claim 12 wherein said marks of a first color further comprises dots of a first color ink and wherein said marks of a second color further comprises dots of a second color ink.

10 15. A hardcopy output in accordance with claim 12 wherein said marks of a first color further comprises superpixels of a first color and wherein said marks of a second color further comprises superpixels of a second color.

16. A hardcopy output in accordance with claim 12 wherein said second color is perceptible to a human and said third color is imperceptible to a human.

15 17. A hardcopy output having information thereon printed by a color printing apparatus, comprising:

a medium having a surface;

20 marks of at least first and second colors deposited on said surface, arranged in a pattern to convey a first information, and arranged in a sequence of said at least first and second colors within at least a portion of said pattern to convey a second information.

18. A hardcopy output in accordance with claim 17 wherein said marks of at least second and third colors further comprises a superpixel coordination of said marks of at least second and third colors.

5 19. A hardcopy output in accordance with claim 17 wherein said marks of a first color further comprises dots of a first color ink and wherein said marks of a second color further comprises dots of a second color ink.

10 20. A hardcopy output in accordance with claim 17 wherein said marks of a first color further comprises superpixels of a first color and wherein said marks of a second color further comprises superpixels of a second color.

21. A printing apparatus placing marks on a medium, comprising:
a first input that accepts first data representing a first information;
15 a second input that accepts second data representing a second information, said second information adding informational value independent of said first information;
a first color marking element that deposits marks of a first color in accordance with said first data; and
a second color marking element that deposits marks of at least a second color in
20 accordance with said second data such that said first information and said second information are printed on the medium and are detectable from the printed medium as separate first information and second information.

22. A printing apparatus in accordance with claim 21 wherein said first color marking element further comprises an ink ejector that ejects drops of a first color ink and wherein said second color marking element further comprises an ink ejector that ejects drops of a second color ink.

	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

PRINTED MEDIUM DATA STORAGE**Abstract of the Disclosure**

A method of, and apparatus for, printing information on a hardcopy medium includes

5 the acceptance of data representing a first information and the acceptance of data representing

a second information. Second information is printed in regions on the medium where first

information data is not printed. Second information data is encoded into a grayscale or color

data representation such that necessary or maximum data density is achieved. First

information is printed using black (K) ink (or alternatively using a different color gamut than

10 that used for printing the second information) such that first information can be filtered out in

a straightforward manner upon scanning of the printed medium by a digital scanning

apparatus, and second information can then be recovered and utilized to advantage.

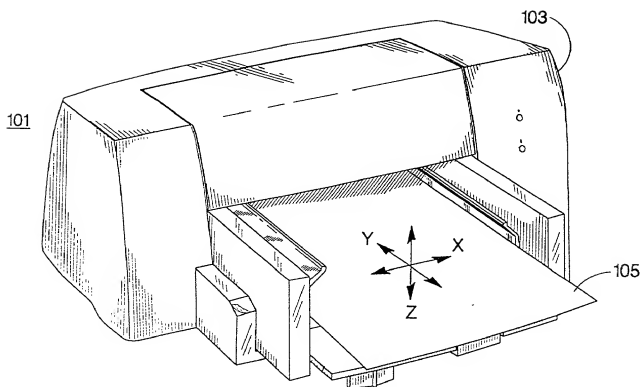


Fig. 1

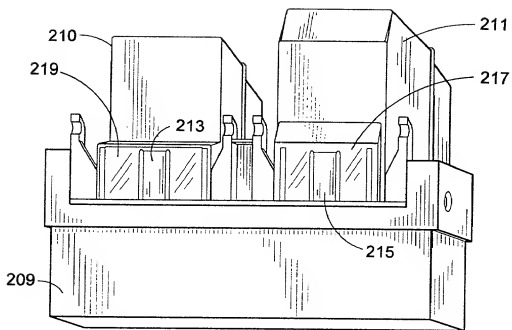


Fig. 2

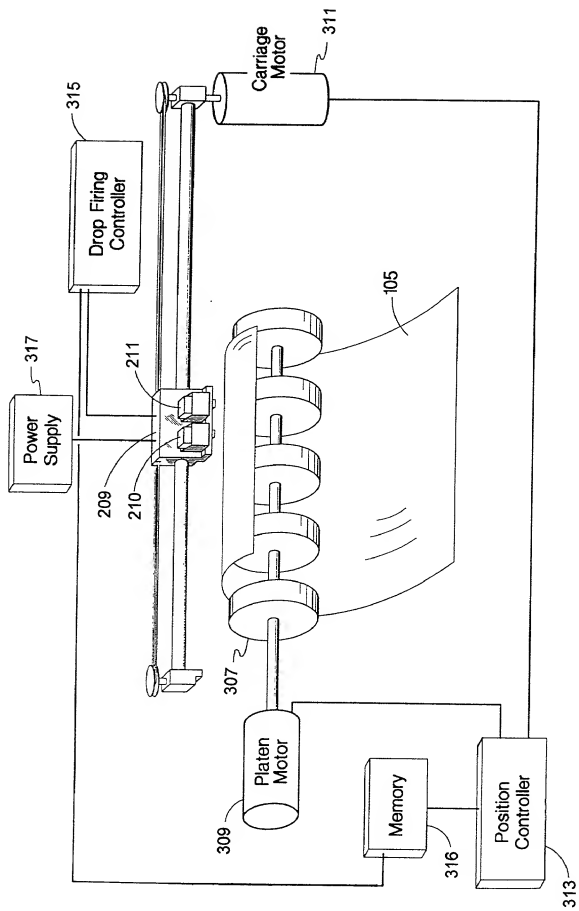


Fig. 3

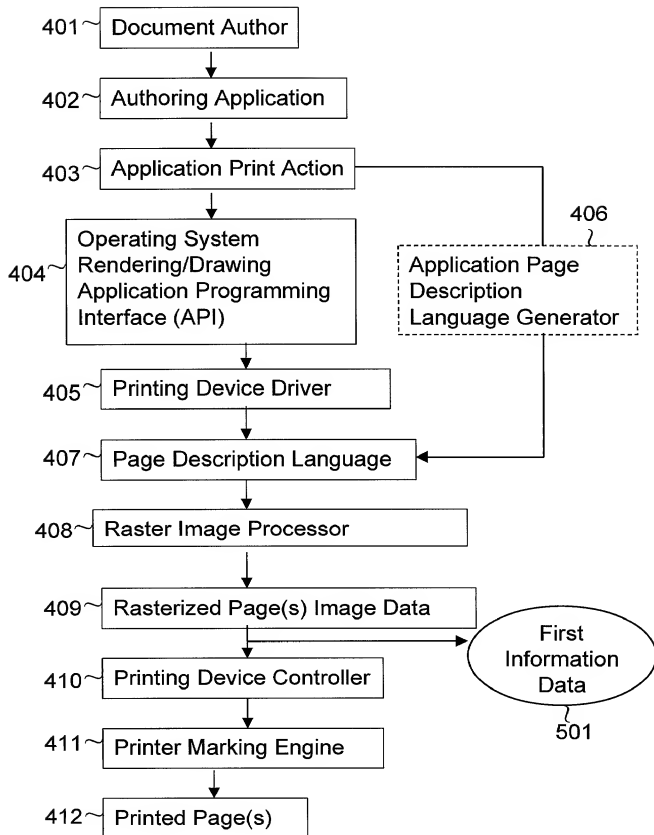


Fig. 4

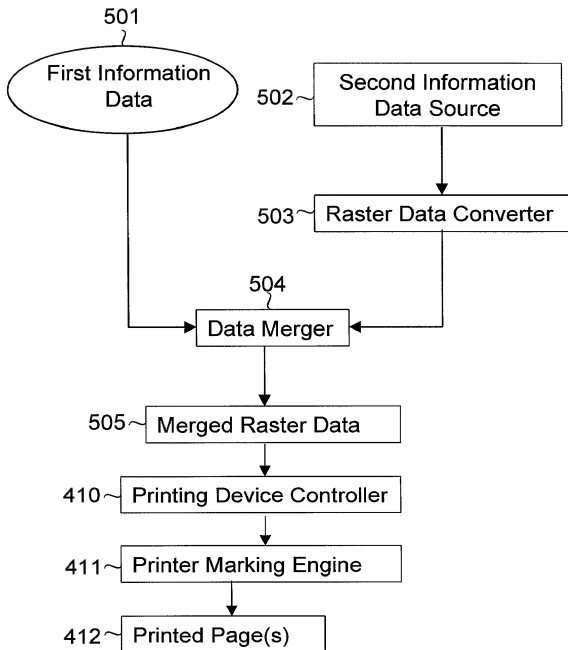


Fig. 5

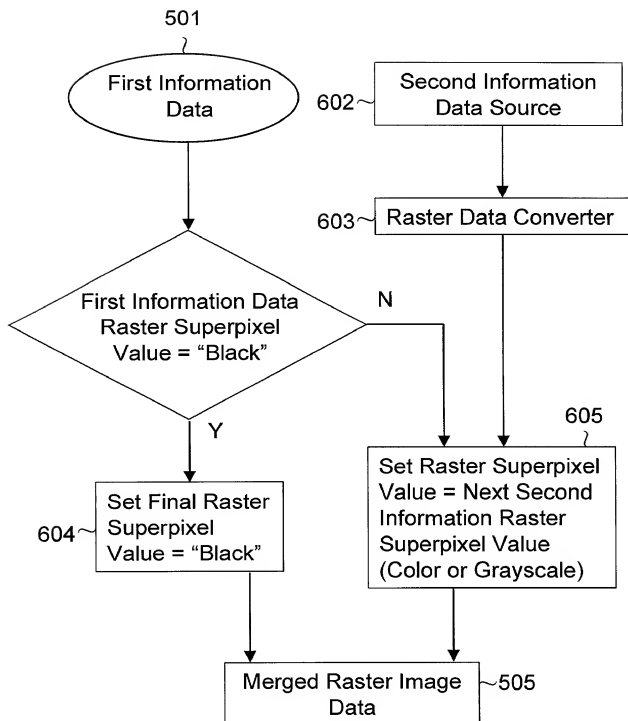


Fig. 6

000210' 59055560

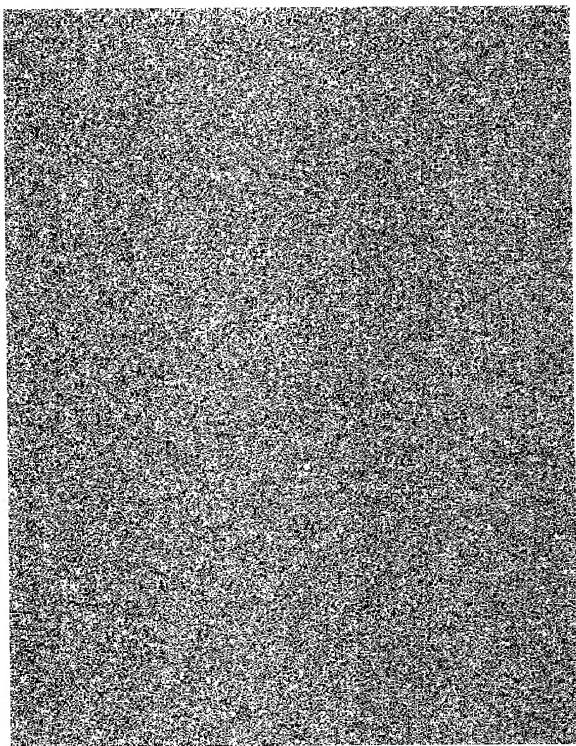


Fig. 7

000240: 55025500

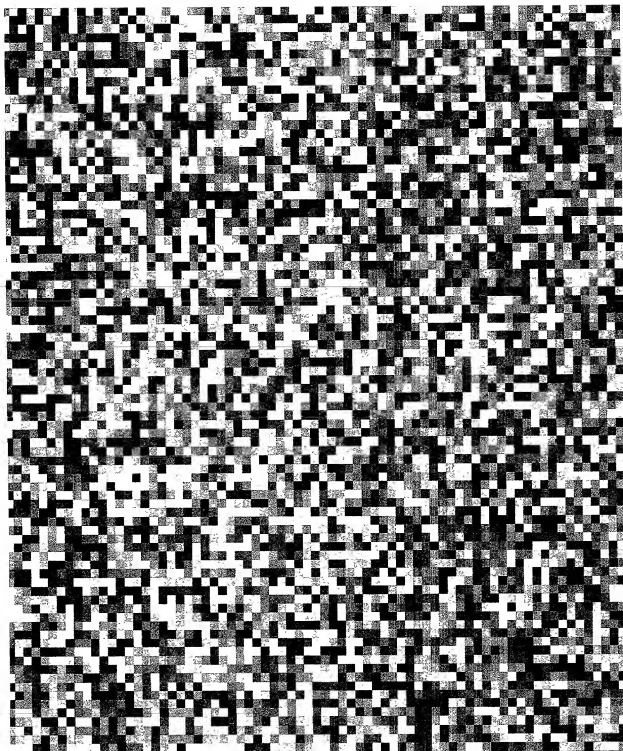


Fig. 8

of textual information
textual information
is a layer of text
This is a layer of
information This
739abcdefghijk
BATT/VEX/2-1

Fig. 11



Fig. 12



Fig. 13

000240-5905560

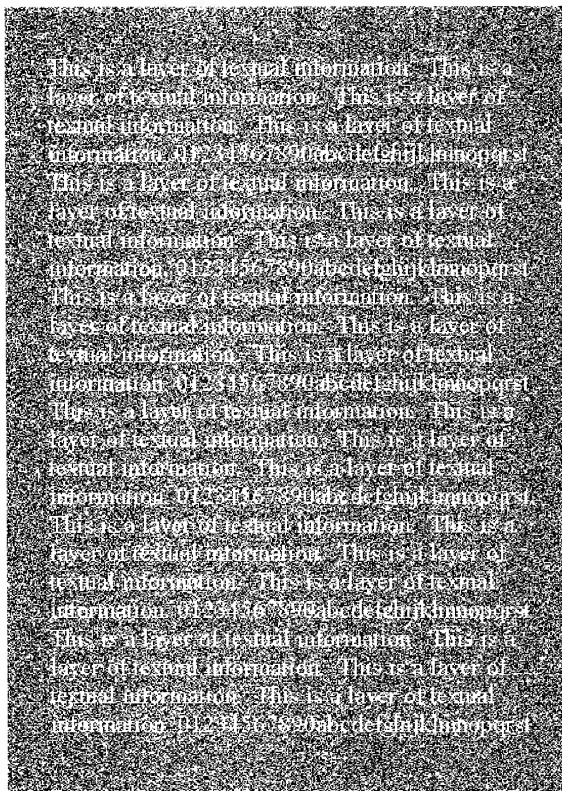


Fig. 14

000070-5805560



Fig. 15



Fig. 16



Fig. 17

000240 5665560



Fig. 18

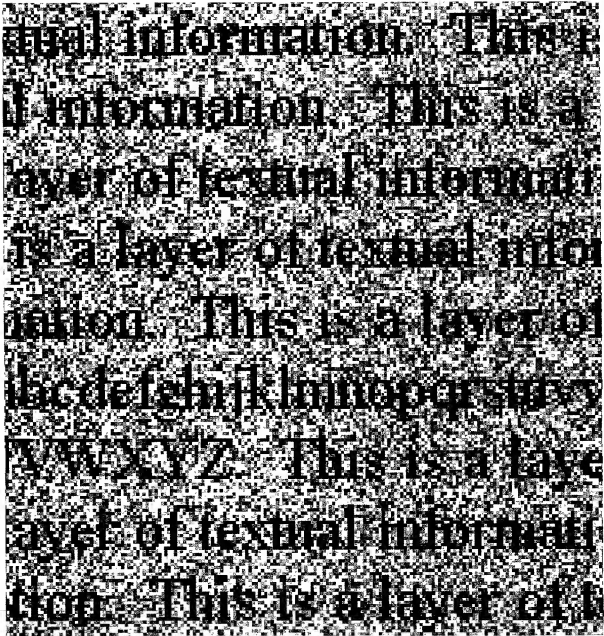


Fig. 19



Fig. 20

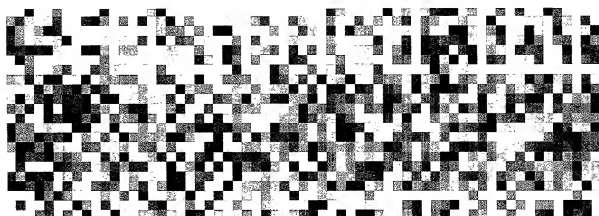


Fig. 21

[illegible]

6

**DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION**ATTORNEY DOCKET NO. 10981337-1

As a below named inventor, I hereby declare that:

My residence/post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Printed Medium Data Storage

the specification of which is attached hereto unless the following box is checked:

() was filed on _____ as US Application Serial No. or PCT International Application Number _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understood the contents of the above-identified specification, including the claims, as amended by any amendment(s) referred to above. I acknowledge the duty to disclose all information which is material to patentability as defined in 37 CFR 1.56.

Foreign Application(s) and/or Claim of Foreign Priority

I hereby claim foreign priority benefits under Title 35, United States Code Section 119 of any foreign application(s) for patent or inventor(s) certificate listed below and have also identified below any foreign application for patent or inventor(s) certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NUMBER	DATE FILED	PRIORITY CLAIMED UNDER 35 U.S.C. 119
			YES: _____ NO: _____
			YES: _____ NO: _____

Provisional Application

I hereby claim the benefit under Title 35, United States Code Section 119(e) of any United States provisional application(s) listed below:

APPLICATION SERIAL NUMBER	FILING DATE

U. S. Priority Claim

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NUMBER	FILING DATE	STATUS (patented/pending/abandoned)

POWER OF ATTORNEY:

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Customer Number 022879Place Customer
Number Bar Code
Label hereSend Correspondence to:
HEWLETT-PACKARD COMPANY
Intellectual Property Administration
P.O. Box 272400
Fort Collins, Colorado 80528-9599

Direct Telephone Calls To:

Raymond A. Jenski
(541) 715-8441

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Inventor: Michael J. JonesCitizenship: USResidence: 6970 NW Diamond Place, Corvallis, OR 97330Post Office Address: same as Residence
Inventor's SignatureDate 4/20/00